


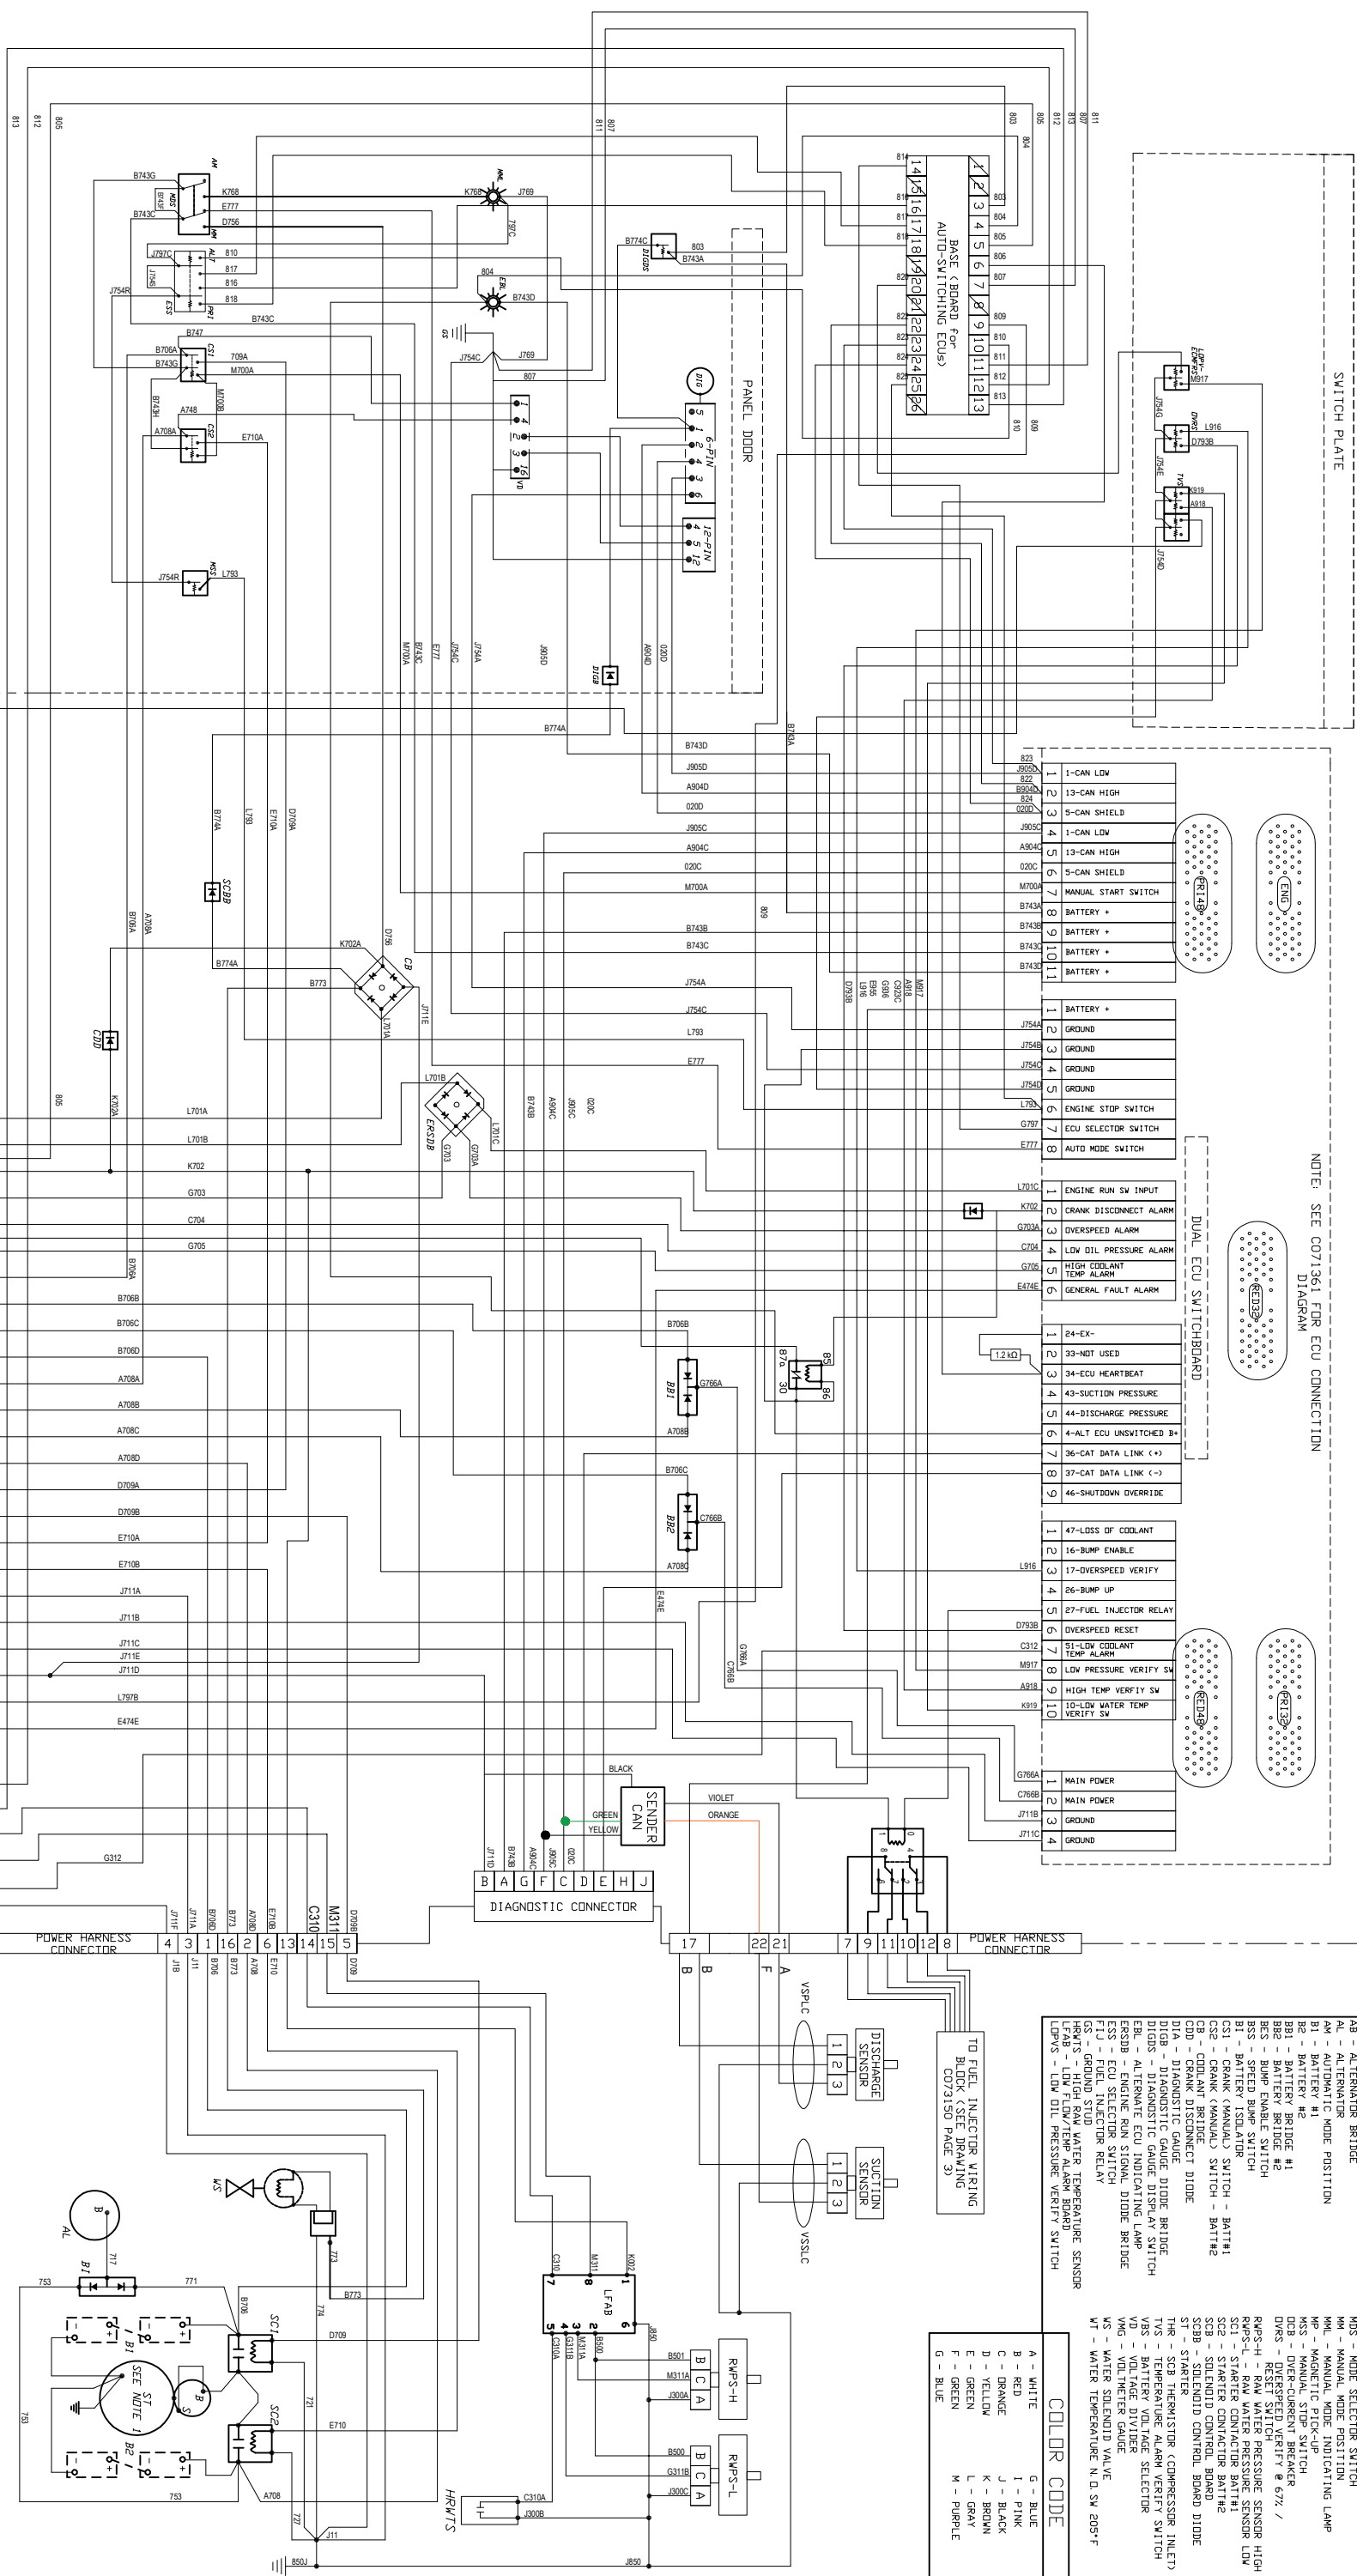

CONTROLLED DRAWING

NOTES:
1) SOME MODELS HAVE A STARTER THAT IS INTERNALLY GROUNDED, FOR THOSE THE BATTERY NEGATIVE CABLE (GND) SHOULD BE ATTACHED TO THE ENGINE BLOCK (ALL PAINT SHOULD BE REMOVED TO BARE METAL)